


**NEW**

## Explosion-Protected Emergency Light Fittings with individual battery sets Series nD843..././.

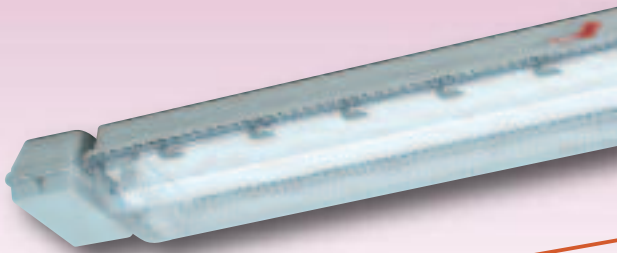

with central locking system

### Application:

Safety illumination in hazardous areas of Zones 2 and 22.

### Mechanical design:

**Housing and battery box:** Glass fibre reinforced polyester, battery box mounted to one front side of the main housing.

**Cover:** Clear polycarbonate with internal prisms.

**Gasket:** Silicone, foamed.

**Reflector:** Glass fibre reinforced polyester, hinged.

**Central locking system:** Operated by a hexagonal socket key 13mm.

**Isolating switch:** 2 switches switching off

all poles when the light fitting is opened. Forced optical indicator showing the actual position of the switch.

**Cable entry:** 2 entries M25 x 1,5 (1 of which plugged) both on the same side.

**Through wiring system:**


**Standard:** Possibility for looping the mains cable up to 4 x 2.5mm<sup>2</sup>.

**Mounting:** 2 suspension hooks (H8V P) or ceiling brackets (15A P) - see accessories/spare parts.

### Options:

See „Further Series/Equipment“.

### Wiring diagram (maintained operation)

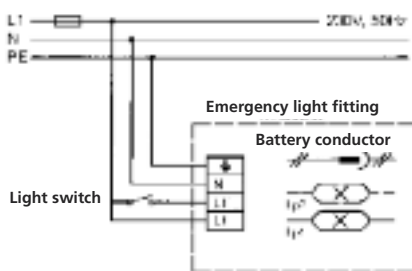

**Start-up:** Connect battery conductor

**Taking out of operation:** Disconnect battery conductor.

**Lamp LP1:** Lighting in mains operation and in case of a mains failure via the batteries.

**Lamp Lp2:** Lighting in mains operation only or in case of lamp failure of Lp1 in emergency operation (2 lamp version only).

**Stand-by wiring:** Do not connect L1'

### Electrical design:

**Microprocessor controlled intelligent emergency electronic device** with „end-of-life-switching-off“-system acc. to IEC 61347-2-3. Redundant low discharge protection and restart blocking system.

**Multi-function LED:** For monitoring the emergency light function and coded indication of the status.

**NiCd batteries:** 6 V/4 Ah or 6 V/7Ah, maintenance-free located in the battery box; quick battery replacement. Electrical disconnection whenever the polycarbonate cover or the battery box are opened.

**Automatic monitoring:** Weekly functioning test, annual 2/3 operating period test.

**Recharging time:** 24h, acc. to EN 60598-2-22.

### Mode of operation:

**Maintained operation:** Switching over to battery operation in case of mains failure. 1 lamp for mains and emergency operation. 2nd lamp for mains operation only. In case 1 lamp fails the second lamp will

take over the emergency operation (2 lamp version only).

**Connection terminals:** Standard L1 + L1' + N + PE, max. range of connection 2.5mm<sup>2</sup>

**1. Direct phase L1,** (or L2, L3) comes from the circuit fuse and is directly (not via the switch) connected to L1 terminal (or L2, L3) (= charging phase). Consequently if the light fitting is switched off the direct phase is live unless the fuses are open or removed.


**2. Switched phase L1'** (or L2', L3') goes to connection terminal L1' (or L2', L3') via the switch and must be electrically identical with the direct phase L1 (or L2, L3).

**3. Neutral conductor N:** In case of 220V between the outer conductors instead of the N conductor an outer conductor is selected e.g. L2 or L3.

**4. Earth conductor PE**

### SCHUCH Quality - your advantage:

- microprocessor controlled intelligent emergency electronic device with integral ECG
  - "end-of-life switching-off system" basing on the latest standards IEC 60079-7
  - multi-function LED with coded indication of the functions, status and potential failures of the electronic device and of the batteries
  - special signal whenever there is an EOL situation (LED red flashing)
  - maintained or stand-by wiring
  - automatic weekly function test
  - automatic annual operating period test
  - function and operating period test can be effected manually
- highest degree of safety in case of a lamp failure during the emergency light operation
  - If there is a lamp failure in case of emergency operation the second lamp will automatically take over the emergency operation (2 lamp version only)
- application within a wide range of temperature of -20°C up to +55°C (recommended 0°C up to +40°C)
- best suitable for continuous row installation
  - Looping the mains cable at one small end of the housing or internal through wiring system in all types
- central locking system with detachable cover for easy lamp replacement




# nD843..././.



II 3 G Ex d nA q IIC  
T4 Gc

II 3 D Ex tc IIIC  
T80°C Dc

IP66



### EC-Type Examination Certificate:

PTB 07 ATEX 2031, 2040

### Marking:

II 3 G Ex d nA q IIC T4 Gc (Zone 2)

II 3 D Ex tc IIIC T80°C Dc (Zone 22)

Ignition protection: „nA“



Rated voltage: 220-254V, AC, ± 10%,

50-60Hz

### Admissible ambient temperature:

-20°C bis +55°C

(recommended: 0°C bis +40°C)

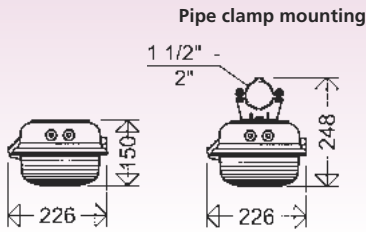


Type	Article no.	Lamps/ Watt	Lumin. flux- fact.appr.%	Weight appr.kg <sup>3)</sup>
<b>1h emergency operation</b>				
nD843 218/70/1	84300 0001	2 x T26/18W	70	7,6
nD843 236/35/1	84300 0002	2 x T26/36W	35	9,5
<b>3h emergency operation</b>				
nD843 218/45/3	84300 0003	2 x T26/18W	45	8,0
nD843 236/30/3	84300 0004	2 x T26/36W	30	9,9

1) Battery 7Ah  
2) Battery 4Ah

3) Weights without packing material

### Suspension hooks H8V Ceiling brackets 15A

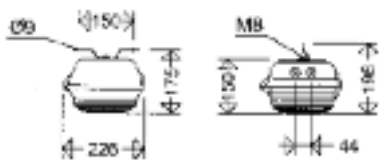

## Further Series / Equipment

- up to 4 cable entries
- for 1.5h emergency operation
- with remote switch connection
- with aluminium mirror-type reflectors (series nD843... S) for high installations
- with different luminous flux factors (battery capacity)

## Accessories / Spare Parts

Type	Article no.	
<b>Spare rechargeable batteries</b>		
Akku 2627 4Ah	90222 9021	
Akku 2628 7Ah	90222 9022	
<b>Spare diffusers</b>		
8402 SIL	84001 9003	for 18 W
8404 SIL	84001 9004	for 36 W
<b>Cable glands</b>		
2537	90117 9000	ex-protected plastic cable gland M25 x 1,5
2538	90118 9000	ex-protected plastic plug M25 x 1,5
KLIMASTUTZEN EX	90259 9000	M25 x 1,5
<b>Mounting material</b>		
H8V P	90001 0002	2 hooks with bolts, stainless steel
15A P	90000 0002	2 ceiling brackets, hot galvanized steel
15AV P	90032 0002	2 ceiling brackets, stainless steel
84 AA	90000 0011	1 pair of brackets, stainless steel, for compensating the different mounting distances of types e840 / e152 or nD843 / e148
RO84 112 A P	90037 0004	2 pipe clamps 1 1/2", stainless steel, with support
RO84 2 A P	90038 0004	2 pipe clamps 2", stainless steel, with support
W 26 P	26000 0004	2 wall mounting angles
W 26/30 P	26000 0002	2 wall mounting angles 30°
W 26/45 P	26000 0003	2 wall mounting angles 45°
<b>Self-adhesive standard legends</b>		
590/125/33 W	59000 0004	for Type nD843 118/218
590/125/34 W	59000 0005	for Type nD843 118/218
590/125/35 W	59000 0006	for Type nD843 118/218

### Self-adhesive legends for marking escape routes acc. to DIN EN ISO 7010 and ASR A1.3.



590/125/33 W      ..../34 W      ..../35 W  
Viewing = 25m.

Further accessories as well as carrier rail systems and through wiring systems are available.